


BOYUT BİLGİLERİ

4" Dişli Üst Açıklıklı Tanklar

SANTEK

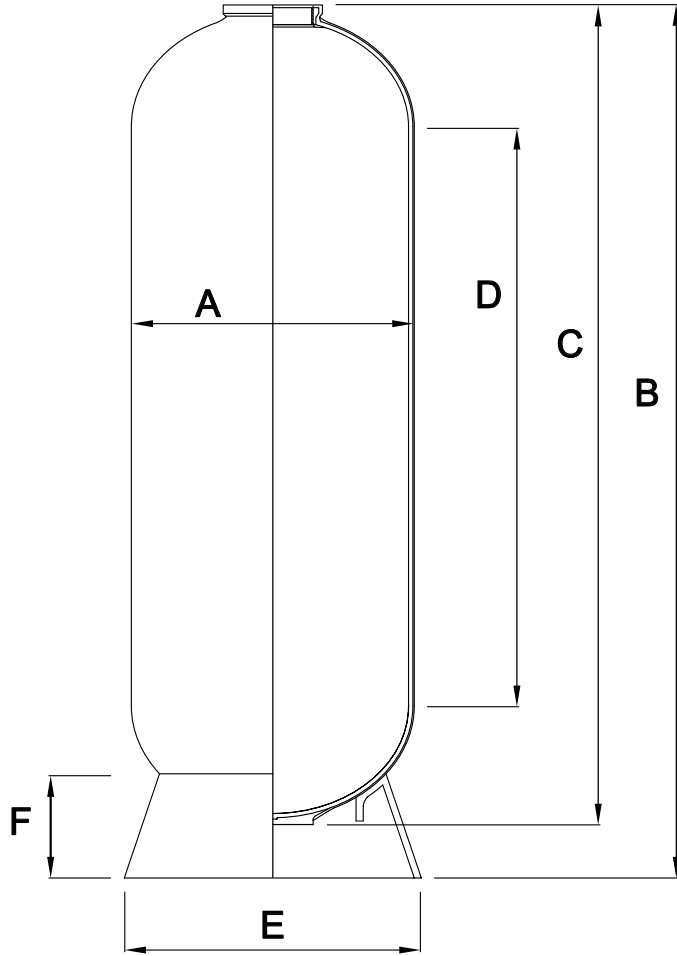

| | Tank Çapı A mm | Toplam Boy B mm | Tank Boy C mm | Silindir Boy D mm | Baza Çapı E mm | Baza Yükseklği F mm | Tank Hacmi l | Tank Ağırlığı kg |
|-----------|----------------------|--------------------------|------------------------|----------------------------|-------------------------|------------------------------|--------------------|------------------------|
| TO4 14x65 | Ø 363 | 1656 | 1640 | 1250 | Ø 350 | 80 | 147 | 17,7 |
| TO4 16x65 | Ø 414 | 1651 | 1633 | 1205 | Ø 350 | 80 | 190 | 19,2 |
| TO4 18x65 | Ø 465 | 1688 | 1641 | 1275 | Ø 475 | 135 | 270 | 26,0 |
| TO4 21x60 | Ø 536 | 1605 | 1536 | 1150 | Ø 475 | 135 | 317 | 28,8 |
| TO4 24x72 | Ø 617 | 1890 | 1810 | 1355 | Ø 475 | 135 | 470 | 44,3 |
| TO4 30x72 | Ø 776 | 1935 | 1825 | 1265 | Ø 700 | 200 | 764 | 72,3 |
| TO4 36x72 | Ø 928 | 1990 | 1930 | 1200 | Ø 930 | 237 | 1064 | 110,0 |

Çalışma Basıncı : 0 - 10 bar
Çalışma Sıcaklığı : 1 - 65 °C